



代码			①轴承用螺帽	②轴承用齿形防松垫圈
分类	①+②组件	①单体	材质	材质
钢	BAJLK	BAJL	SS400	SPCC
不锈钢	BAJLSK	BAJLS	No.10~20 SUS303 No.25~50 SUS304	SUS304

①轴承用螺帽

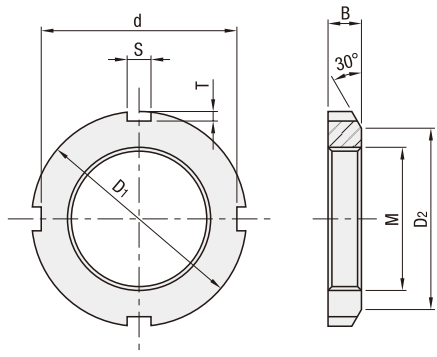

②轴承用齿形防松垫圈

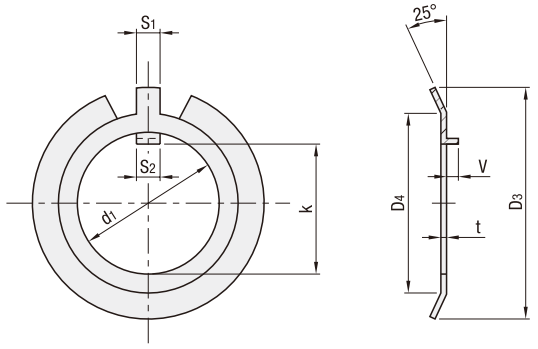

螺纹精度 JIS B0211 6H (2级)



① 型号 - ② NO.
①+②组件 BAJLK20
①单体 BAJL20



型号区分: 5 天发货
代码

型号		①轴承用螺帽							参考重量 (g)			
① 代码	② No.	M×螺距 (细牙螺纹)	D1	D2	B	d	S	T	1每套 (①+②)		每个 (①单体)	
									BAJLK	BAJLSK	BAJL	BAJLS
①+②组件 (钢) BAJLK (不锈钢制) BAJLSK	10	10×0.75	18	13	4	14	3	2	5	5.3	3.7	4.1
	12	12×1.0	22	17		18			8.3	8.2	6.4	6.6
	15	15×1.0	25	21		21			12.5	12.7	10	10.3
	17	17×1.0	28	24	5	24			15.5	16.3	12.4	13
	20	20×1.0	32	26		28			21.5	22.8	19	19.5
①单体 (钢) BAJL (不锈钢制) BAJLS	25	25×1.5	38	32	7	34			31.4	36.6	25	31.2
	30	30×1.5	45	38		41			47.8	48.3	40	41.1
	35	35×1.5	52	44		48			63.4	73.7	53	64.3
	40	40×1.5	58	50	9	53			97.3	97.7	85	86.5
	45	45×1.5	65	56		60		2.5	134.2	135	119	121
	50	50×1.5	70	61		65			162.5	161.5	146.5	147

② No.	②轴承用齿形防松垫圈									齿形防松垫圈安装槽加工尺寸(参考值)	
	d1	k	S1	S2	t	V	D3	D4	齿数	槽宽a	槽深b
10	10	8.5	3	3	1.0	2	21	13	9	4	2
12	12	10.5					25	17			
15	15	13.5					28	21			
17	17	15.5	4	4		32	24	13	5		
20	20	18.5				36	26				
25	25	23				42	32				
30	30	27.5	5	5	1.2	2.5	49	38	15	7	2.5
35	35	32.5					57	44			
40	40	37.5					62	50			
45	45	42.5	6	6			69	56	17		3
50	50	47.5					74	61			

