




■六角型



代码	材质	表面处理
BDLHB	S45C	发黑
BDPLHB		无电解镀镍
BDSLHB	SUS304	—

6.3/(1.6/)

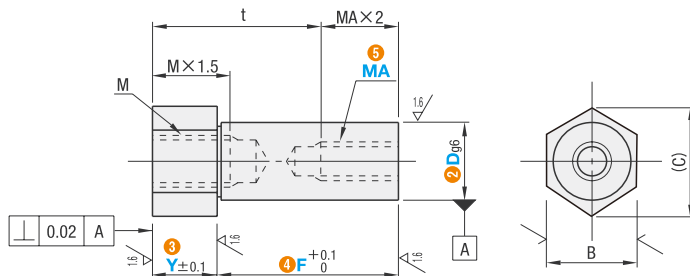

型号 ① 代码	② Dg6		最小单位 1mm		⑤ MA (粗牙螺纹) 选择				M (粗牙螺纹)	B	(C)	D	M	t
			③ Y	④ F										
BDLHB BDPLHB BDSLHB	6	—0.004 —0.012	2~60	5~100	3				M3	8	9.2	6	M3	11
	8	—0.005 —0.014			4				M4	10	11.5	8	M4	12.5
	10				4	5	6	M6	13	15.0	10	M6	14	
	12	—0.006 —0.017	10~100	5 6 8				M8	14	16.2	12	M8	17	
	15			6 8 10				M10	17	19.6	15	M10	20	
	20	—0.007 —0.020		4~60	6 8 10 12				M12	24	27.7	20	M12	25



型号(①代码·②D) — ③Y — ④F — ⑤MA — (APC)
BDFHB20 — 50 — F32 — MA10 — APC

可选加工	嵌入加工		
代码	APC		
技术说明	在座面部分嵌入加工。 ① 所有型号适用		
	指定方法 APC		
	D	M	APCg6
	6	M3	6
	8	M4	8
	10	M6	10
	12	M8	12
	15	M10	15
	20	M12	20