



■ 请按步骤①~④选择型号和参数后进行订购。

链条 型号 — 链数
 节数指定型 CEE40 — 400
 链轮 型号(①代码·②齿数) — 规格 — 轴孔直径
 CE40B20 — N — 20


型号区分:
 交货期 代码

7 天发货

■ 链条40B



代码	材质
CEE40	钢
CEES40	SUS304

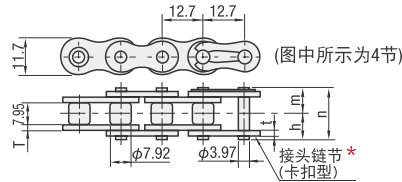

* 附带接头链节，
需自行安装。

■ 节数指定型

① 型号	② 节数指定 (指定偶数)	h	m	n	t	容许 最大张力(kN)	节距(P)
(链条)CEE40	4~	8.02	9.53	17.55	1.5	3.63	12.7
(链条)CEES40	4~	8.02	9.53	17.55	1.5	0.44	


■ 链轮40B



代码	材质	表面处理	附件
CE40B	S45C	—	固定螺丝
CEB40B	(齿顶高频淬火)	发黑	(仅轴孔规格N)
CES40B	SUS304	—	

■ 轴孔加工尺寸表

轴孔直径D	键槽b2×t2	固定螺丝M
10K~12	4×1.8	5
14~17	5×2.3	6
18~22	6×2.8	6
24~30	8×3.3	8
32~35	10×3.3	8
40	12×3.3	8



轴孔规格④S 轴孔规格④N
 (底孔) (新JIS键+螺纹孔)

① 齿顶和键槽的偏移量为±0.5mm

型号		③ 轴孔 规格	④ 轴孔直径		Dp	Do	盖轂			ℓ
① 代码	② 齿数		S规格 (Dh8)	N规格 (Dh7)			H	GD	L	
CE40B CEB40B	9	S	9	12 14	37.13	42	28	23	22	5
	10		9	12 14 15 16 17	41.1	46	32	27		
	11		10	12 14 15 16 17 18 19 20	45.08	51	36	31		
	12		10	12 14 15 16 17 18 19 20 22	49.07	55	40	35		
	13		12	12 14 15 16 17 18 19 20 22	53.07	59	37			
	14		12	12 14 15 16 17 18 19 20 22 24 25*	57.07	63	42			
	15		12	12 14 15 16 17 18 19 20 22 24 25 28 30*	61.08	67	46		25	6
	16		13	14 15 16 17 18 19 20 22 24 25 28 30 32	65.1	71	50			
	17		13	14 15 16 17 18 19 20 22 24 25 28 30 32 35	69.12	76	54			
	18		13	14 15 16 17 18 19 20 22 24 25 28 30 32 35	73.14	80	57			
	19		14	14 15 16 17 18 19 20 22 24 25 28 30 32 35 40	77.16	84	62			
	20		14	14 15 16 17 18 19 20 22 24 25 28 30 32 35 40	81.18	88	67			
	21	N	14	14 15 16 17 18 19 20 22 24 25 28 30 32 35 40	85.21	92	71		28	10
	22		14	14 15 16 17 18 19 20 22 24 25 28 30 32 35 40	89.24	96	75			
	23		14	14 15 16 17 18 19 20 22 24 25 28 30 32 35 40	93.27	100	77			
	24		14	14 15 16 17 18 19 20 22 24 25 28 30 32 35 40	97.3	104				
	25		14	14 17 18 19 20 22 24 25 28 30 32 35 40	101.33	108				
	26		14	18 19 20 22 24 25 28 30 32 35 40	105.36	112			63	7
	27		14	20 22 24 25 28 30 32 35 40	109.39	116				
	28		14	20 22 24 25 28 30 32 35 40	113.43	120				
	29		14	20 22 24 25 28 30 32 35 40	117.46	124				
	30		14	20 22 24 25 28 30 32 35 40	121.50	128				
	31		14	20 22 24 25 28 30 32 35 40	125.53	132				
CES40B	9	S	9	12 15 16	41.1	46	32	27	22	5
	10		9	15 16 18 20	45.08	51	36	31		
	11		10	15 16 18 20	49.07	55	40	35		
	12		10	15 16 18 20	53.07	59	37			
	13		12	15 16 18 19 20 22 24 25*	57.07	63	42		25	6
	14		12	15 16 18 19 20 22 24 25 28	61.08	67	46			
	15		13	15 16 18 19 20 22 24 25 28 30	65.1	71	50			
	16		13	15 16 18 19 20 22 24 25 28 30	69.12	76	54			
	17		13	15 16 18 19 20 22 24 25 28 30	73.14	80	57			
	18		14	15 16 18 19 20 22 24 25 28 30	77.16	84	62			
	19		14	15 16 18 19 20 22 24 25 28 30	81.18	88	67		28	10
	20		14	15 16 18 19 20 22 24 25 28 30	85.21	92	71			
	21	N	14	18 20 22 24 25 28 30	89.24	96	75			
	22		14	18 20 22 24 25 28 30	93.27	100	77			
	23		14	18 20 22 24 25 28 30	97.3	104				
	24		14	18 20 22 24 25 28 30	101.33	108				
	25		14	20 22 24 25 28 30	105.36	112			63	7
	26		14	20 22 25 30	109.39	116				
	27		14	20 22 25 30	113.43	120				
	28		14	20 22 25 30	117.46	124				
	29		14	20 22 25 30	121.50	128				
	30		14	20 22 25 30	125.53	132				
	31		14	20 22 25 30	129.57	137			68	10
	32		14	20 22 25 30	133.60	141				
	33		14	20 22 25 30	137.64	145				
	34		14	20 22 25 30	141.68	149				
	35		14	20 22 25 30	145.72	153				
	36		14	20 22 25 30	149.76	157				
	37		14	20 22 25 30	153.79	161				
	38		14	20 22 25 30	157.83	165				
	39		14	20 22 25 30	161.87	169				
	40		14	20 22 25 30	165.91	173				