



型号(1代码·2D) — (3T) — (4d) — (5L)

CCRLA50 — T10 — 20 — L300

CCRLAU40 — T10 — 20 — L400

■ 请按步骤①~⑤选择型号和参数后进行订购。



型号区分: **7** 天发货


■带轴承型



代码	材质		表面处理 (衬层)	硬度
	芯材	轴承		
CCRLA	铝合金	钢	本色阳极氧化	—
CCRLAU			聚氨酯 (自然色)	肖氏A90
CCRLAG				肖氏A70


■特长：使用专用拉制铝管。重量轻、价格低。

芯材

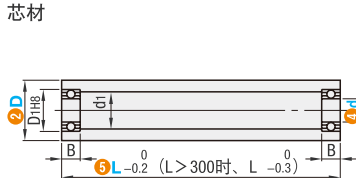

❗ 轴承可拆卸。发货时使用胶带临时固定。

聚氨酯衬层

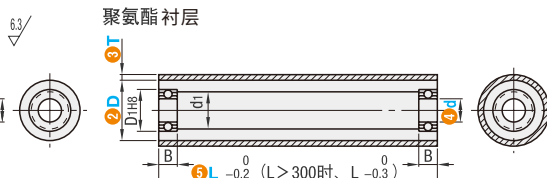


❗ 该产品的外径为 $D+2T$ 。(与其它滚轮有所不同。)

型号		聚氨酯厚度 ③ T选择	④ d	⑤ L 选择	适用 轴承	D ₁	B	d ₁				
① 代码	② D							铝合金	钢	不锈钢		
芯材 CCRLA	30	3	8	100 150 200 250 300 350 400 450 500	B698ZZ	19	6	15	—	—		
			8A		B608ZZ	22	7	—	15.8	18		
			10		B6900ZZ	22	6	15				
			12		B6901ZZ	24			8	17	18.7	20
8	B628ZZ		24									
10	B6000ZZ		26		7	22	22.7	22				
12	B6901ZZ		24									
聚氨酯衬层 CCRLAU CCRLAG	40		15		B6902ZZ	28	7	22	22	18	22	
			20		B6804ZZ	32						
			50		10	B6200ZZ	30	9	17	18	22	
					12	B6001ZZ	28	8	22			
	60				15	B6902ZZ	28	7	17	30	28	
		20		B6904ZZ	37	9	27					
		25	B6905ZZ	42	22			—				
		12	B6201ZZ	32		10	32		—			
	15	B6002ZZ	9									
	80	20	B6904ZZ	37	9	41		—		—		
		25	B6905ZZ	42								
		30	B6906ZZ	47	15							
25		B6205ZZ	52	13								
30	B6006ZZ	55	10									
35	B6907ZZ											

①端面已进行避空加工，可避免接触轴承内圈。②*1 D35不适用于聚氨酯烧结品。③部分尺寸可能规格不全，敬请注意。



型号 (1 代码 · 2 D) - (3 T) - (4 d) - L (LC)
CCRLA50 - 20 - LC151

可选加工	代码	变更L尺寸
变更L尺寸	LC	 指定方法 LC151 (将L变更为LC) LC=指定单位1mm ① 50 ≤ LC ≤ 499