





■ 滚针轴承



BAKXZ (带止推滚珠滚针轴承)

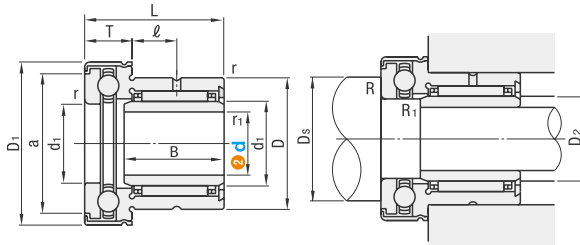

BAKXRZ (带止推滚针滚针轴承)

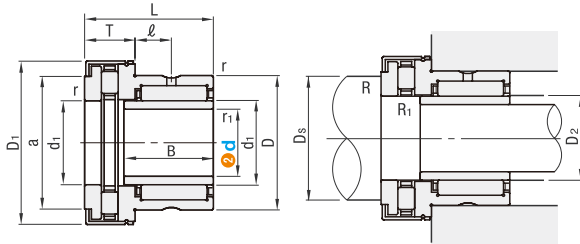

■ 推荐配合

轴	固定座
k6	K6

材质 SUJ2
附件 外盖
轴承精度 JIS B 1514 0级



① 型号 ② d
BAKXZ20



型号区分: 5 天发货
代码

型号		D	B	L	T	r (min.)	r1 (min.)	d1	D1	ℓ	a	径向 基本动态 额定负载 CrkN	基本静态 额定负载 CorkN	轴向 基本动态 额定负载 CakN	基本静态 额定负载 CpakN	容许转速 rpm (参考)	安装尺寸			重量 (g) (参考)
① 代码	② d																Ds (min.)	R (max.)	R1 (max.)	
BAKXZ	7	19				0.3	0.3	10	25.2		18	6.2	7.8	10.0	14.0	7200	18	0.3	0.3	40.9
	9	21	16	23	9			12	27.2	6.5	20	9	11	10.3	15.4	6600	20			46
	12	24						15	29.2		23	10.7	12.7	10.5	16.8	5700	23			54.6
	14	26	17	25				17	31.2	8.0	25	11.9	15	10.8	18.2	5100	25			64.5
	17	30			10			20	36.2	10.5	29	16.4	23.8	14.3	24.7	4500	29			103.5
	20	37						25	43.2	9.5	35	18.8	30.5	19.6	37.5	3600	35			159.5
	25	42						30	48.2		40	22.6	36	20.4	42.0	3000	40			180.8
	30	47	20		11			35	53.2	9.0	45	24.3	41.5	21.2	47.0	2700	45			207
	35	52			12			40	61.2	10	52	26	47	27	63	2400	52			252.2
	40	58			13			45	66.5	9	57	27.5	53	28	69	2100	57			315.8
	50	72	25	40	17	1	1	60	86.5	12	75	42	90	41.5	113	1600	75	1	1	542

型号		D	B	L	T	r (min.)	r1 (min.)	d1	D1	ℓ	a	径向		轴向		容许转速 rpm (参考)	安装尺寸			重量 (g) (参考)		
① 代码	② d											基本动态 额定负载 CrkN	基本静态 额定负载 CorkN	基本动态 额定负载 CakN	基本静态 额定负载 CpakN		Ds (min.)	R (max.)	R1 (max.)			
BAKXRZ	12	24	16	23	9	0.3		15	29.2	6.5	25	10.7	12.7	14.4	28.5	7800	25	0.3	0.3	52.6		
	14	26	17	25				17	31.2	8	27	11.9	15	15.9	33.5	7200	27			62.5		
	17	30						10	20	36.2	10.5	32	16.4	23.8	24.9	53	6000			32	97.5	
	20	37			11			0.6	25	43.2		39	18.8	30.5	33.5	76	5100	39		0.6	152.5	
	25	42	20	30					30	48.2	9.5	44	22.6	36	35.5	86	4500	44			173.8	
	30	47							12	35	53.2	9	49	24.3	41.5	39	101	3900			49	204
	40	58			14				0.6	45	66.5	9	61	27.5	53	59	163	3000		61	0.6	310.8
	45	62	25	35						50	71.5	10	66	38	74	61	177	2800		66		358.8