




| 代码     |        | 材质  |      | 表面处理     | 附件  |
|--------|--------|-----|------|----------|-----|
| 高度h选择型 | 高度h指定型 | 轴承  | 固定座  | 固定座      | 挡圈  |
| BBLKB  | BBLFB  | 钢   | S45C | 发黑       | 弹簧钢 |
| BBLK   | BBLF   |     |      | 无电解镀锌    |     |
| BBLKSA | —      | 不锈钢 | 铝合金  | 本色阳极氧化处理 |     |

6.3/(1.6/)

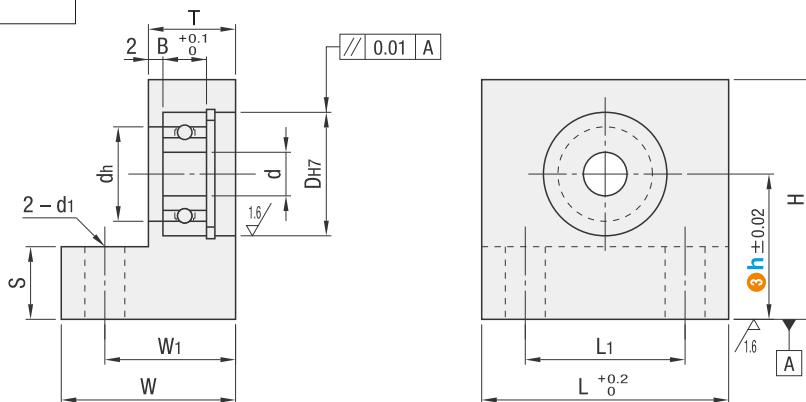

型号(①代码·②轴承型号) — ③h  
BBLK6000ZZ — 30

■ 请按步骤①~③选择型号和参数后进行订购。



型号区分: 7 天发货

| 型号                                |        | ③h       |                | d  | H    | L <sub>1</sub> | d <sub>1</sub> | L  | W <sub>1</sub> | W  | T  | S    | dh | DH7 | B  |
|-----------------------------------|--------|----------|----------------|----|------|----------------|----------------|----|----------------|----|----|------|----|-----|----|
| ① 代码                              | ② 轴承型号 | 高度选择型    | 高度指定型<br>单位1mm |    |      |                |                |    |                |    |    |      |    |     |    |
| 高度h选择型<br>BBLKB<br>BBLK<br>BBLKSA | 623ZZ  | 15 20 25 | 15~30          | 3  | h+9  | 10             | 4.5            | 20 | 15             | 20 | 10 | 5    | 7  | 10  | 4  |
|                                   | 624ZZ  |          |                | 4  | h+11 | 12             |                | 22 | 15             | 20 | 10 |      | 9  | 13  | 5  |
|                                   | 605ZZ  |          |                | 5  | h+11 | 14             |                | 24 | 15             | 20 | 10 |      | 10 | 14  | 5  |
|                                   | 625ZZ  |          |                | 5  | h+12 | 16             |                | 28 | 16             | 22 | 10 |      | 12 | 16  | 5  |
|                                   | 606ZZ  | 20 25 30 | 20~30          | 6  | h+13 | 22             | 5.5            | 34 | 18             | 24 | 12 | 10   | 13 | 17  | 6  |
|                                   | 626ZZ  |          |                | 6  | h+14 | 24             |                | 36 | 18             | 24 | 12 |      | 15 | 19  | 6  |
|                                   | 608ZZ  |          |                | 8  | h+15 | 26             |                | 38 | 18             | 24 | 12 |      | 18 | 22  | 7  |
|                                   | 628ZZ  |          |                | 8  | h+16 | 22             |                | 34 | 21             | 27 | 15 |      | 20 | 24  | 8  |
|                                   | 6900ZZ | 25 30    | 25~30          | 10 | h+15 | 20             |                | 32 | 18             | 24 | 12 |      | 19 | 22  | 6  |
|                                   | 6000ZZ |          |                | 10 | h+17 | 26             |                | 38 | 21             | 27 | 15 |      | 22 | 26  | 8  |
| 高度h指定型<br>BBLFB<br>BBLF           | 6200ZZ | 25 30 40 | 25~40          | 10 | h+19 | 28             | 6.5            | 40 | 21             | 27 | 15 | 15   | 24 | 30  | 9  |
|                                   | 6901ZZ |          |                | 12 | h+16 | 24             |                | 36 | 18             | 24 | 12 |      | 21 | 24  | 6  |
|                                   | 6001ZZ |          |                | 12 | h+18 | 28             |                | 40 | 21             | 27 | 15 |      | 24 | 28  | 8  |
|                                   | 6201ZZ |          |                | 12 | h+20 | 30             |                | 42 | 22             | 28 | 16 |      | 26 | 32  | 10 |
|                                   | 6902ZZ | 30 40 50 | 30~50          | 15 | h+18 | 30             | 9              | 42 | 18             | 24 | 12 | 12.5 | 25 | 28  | 7  |
|                                   | 6002ZZ |          |                | 15 | h+20 | 36             |                | 50 | 22             | 29 | 15 |      | 28 | 32  | 9  |
|                                   | 6202ZZ |          |                | 15 | h+22 | 30             |                | 44 | 24             | 31 | 17 |      | 29 | 35  | 11 |
|                                   | 6903ZZ |          |                | 17 | h+19 | 30             |                | 42 | 20             | 26 | 13 |      | 27 | 30  | 7  |
|                                   | 6003ZZ | 30 40 50 | 30~50          | 17 | h+22 | 36             | 11             | 50 | 24             | 31 | 16 | 15   | 31 | 35  | 10 |
|                                   | 6203ZZ |          |                | 17 | h+24 | 36             |                | 48 | 26             | 33 | 20 |      | 34 | 40  | 12 |
|                                   | 6904ZZ |          |                | 20 | h+23 | 31             |                | 45 | 22             | 29 | 15 |      | 34 | 37  | 9  |
|                                   | 6004ZZ | 40 50 60 | 40~60          | 20 | h+25 | 38             |                | 54 | 27             | 35 | 19 |      | 36 | 42  | 12 |
|                                   | 6204ZZ |          |                | 20 | h+28 | 44             |                | 60 | 28             | 36 | 20 |      | 40 | 47  | 14 |
|                                   | 6005ZZ |          |                | 25 | h+28 | 46             |                | 62 | 27             | 35 | 19 |      | 41 | 47  | 12 |
|                                   | 6205ZZ |          |                | 25 | h+31 | 50             |                | 70 | 32             | 42 | 22 |      | 45 | 52  | 15 |
|                                   | 6006ZZ | 50 80    | 50~80          | 30 | h+32 | 54             | 11             | 74 | 30             | 40 | 20 | 20   | 48 | 55  | 13 |
|                                   | 6206ZZ |          |                | 30 | h+36 | 62             |                | 82 | 33             | 43 | 23 |      | 55 | 62  | 16 |



型号(①代码·②轴承型号) — ③h — (KKC·KCC·NA)  
BBLF6000ZZ — 30 — KKC

| 可选加工  | 加工倒角 C                                                                                                                                                                                                                                                                                                           | 加工倒角 C2 | 不装配轴承・挡圈 |     |   |       |    |       |    |           |                         |
|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|----------|-----|---|-------|----|-------|----|-----------|-------------------------|
| 代码    | KKC                                                                                                                                                                                                                                                                                                              | KCC     | NA       |     |   |       |    |       |    |           |                         |
| 技术说明  | <div>加工上端两侧倒角C(45°)</div> <div>指定方法</div> <div></div> <div>①仅高度h指定型适用</div> <table><tr><th>d</th><th>KKC</th></tr><tr><td>3~8</td><td>5</td></tr><tr><td>10~20</td><td>10</td></tr><tr><td>25~30</td><td>12</td></tr></table> | d       | KKC      | 3~8 | 5 | 10~20 | 10 | 25~30 | 12 | 加工上端面倒角C2 | 不将轴承、挡圈装入固定座中，而以附件形式发货。 |
| d     | KKC                                                                                                                                                                                                                                                                                                              |         |          |     |   |       |    |       |    |           |                         |
| 3~8   | 5                                                                                                                                                                                                                                                                                                                |         |          |     |   |       |    |       |    |           |                         |
| 10~20 | 10                                                                                                                                                                                                                                                                                                               |         |          |     |   |       |    |       |    |           |                         |
| 25~30 | 12                                                                                                                                                                                                                                                                                                               |         |          |     |   |       |    |       |    |           |                         |