



# 同步轮/同步带/免键轴衬

## 同步齿形带用金属件

下部金属件紧凑型




型号(①代码) — ②皮带种类 · ③皮带公称宽度  
CBCR — XL025



■ 请按步骤①~③选择型号和参数后进行订购。



型号区分: ④ 3 天发货



CBCR  
(安装孔6)

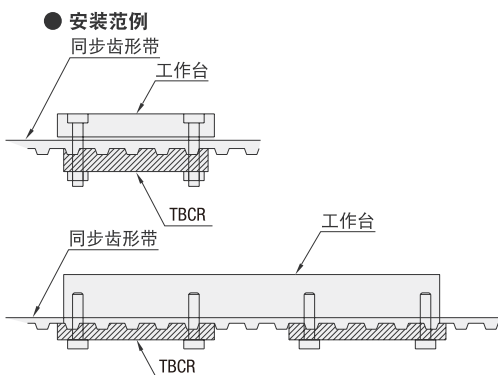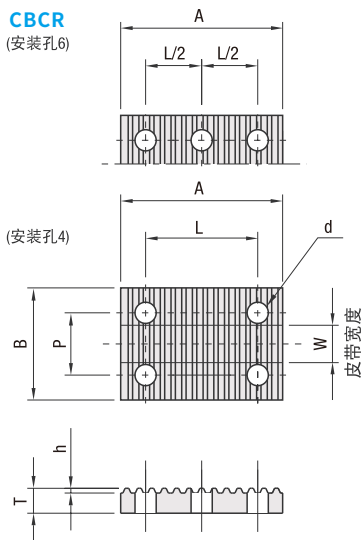

① 齿形以同步齿形带、自由端同步齿形带为标准  
② 皮带宽度以同步齿形带为标准  
材质: 铝合金 表面处理: 本色阳极氧化处理

| 型号   |        |          |      |    |    |    |      |    |    |     |      |
|------|--------|----------|------|----|----|----|------|----|----|-----|------|
| ① 代码 | ② 皮带种类 | ③ 皮带公称宽度 | W    | A  | B  | T  | h    | L  | P  | d   | 安装孔数 |
| CBCR | XL     | 025      | 6.4  | 36 | 24 | 6  | 1.25 | 25 | 12 | 4.5 | 4    |
|      |        | 031      | 7.9  |    | 25 |    |      |    | 14 |     |      |
|      |        | 037      | 9.5  |    | 26 |    |      |    | 16 |     |      |
|      |        | 050      | 12.7 |    | 30 |    |      |    | 20 |     |      |
|      |        | 050      | 12.7 |    | 32 |    |      |    | 20 |     |      |
|      | L      | 075      | 19.1 | 66 | 38 | 8  | 1.9  | 50 | 26 | 5.5 | 4    |
|      |        | 100      | 25.4 |    | 46 |    |      |    | 33 |     |      |
|      |        | 150      | 38.1 |    | 58 |    |      |    | 46 |     |      |
|      |        | 075      | 19.1 |    | 38 |    |      |    | 26 |     |      |
|      | H      | 100      | 25.4 | 89 | 46 | 10 | 2.3  | 70 | 33 | 5.5 | 6    |
|      |        | 150      | 38.1 |    | 58 |    |      |    | 45 |     |      |
|      |        | 200      | 50.8 |    | 70 |    |      |    | 58 |     |      |
|      |        | 060      | 6    |    | 20 |    |      |    | 11 |     |      |
|      | S3M    | 100      | 10   | 21 | 25 | 4  | 1.14 | 15 | 15 | 3.4 | 4    |
|      |        | 150      | 15   |    | 30 |    |      |    | 20 |     |      |
|      |        | 100      | 10   |    | 26 |    |      |    | 16 |     |      |
|      | S5M    | 150      | 15   | 35 | 32 | 6  | 1.81 | 25 | 21 | 4.5 | 4    |
|      |        | 250      | 25   |    | 42 |    |      |    | 31 |     |      |
|      |        | 150      | 15   |    | 34 |    |      |    | 22 |     |      |
|      | S8M    | 250      | 25   | 56 | 44 | 8  | 2.85 | 40 | 32 | 5.5 | 4    |
|      |        | 300      | 30   |    | 50 |    |      |    | 37 |     |      |
|      |        | 400      | 40   |    | 60 |    |      |    | 47 |     |      |
|      |        | 100      | 10   |    | 26 |    |      |    | 16 |     |      |
|      | T5     | 150      | 15   | 35 | 32 | 6  | 1.2  | 25 | 21 | 4.5 | 4    |
|      |        | 200      | 20   |    | 38 |    |      |    | 26 |     |      |
|      |        | 250      | 25   |    | 43 |    |      |    | 31 |     |      |
|      |        | 150      | 15   |    | 34 | 8  | 2.5  | 50 | 22 | 5.5 | 6    |
|      | T10    | 200      | 20   | 70 | 40 |    |      |    | 27 |     |      |
|      |        | 250      | 25   |    | 44 |    |      |    | 32 |     |      |
|      |        | 300      | 30   |    | 50 |    |      |    | 37 |     |      |

CBCR

同步轮·同步带  
免键轴衬

15