



选型示范

①代码 — ②精度 — ③轨道长度L — ④滑块数量 — ⑤电机连接法兰 — ⑥感应器选择

AKM3305C

P

300

1

3D

2

■请按步骤①~⑥选择型号和参数后进行订购。






型号区分:

代码


5天发货



代码	滑块材质	底座材质	底座硬度	导程	电机连接法兰
AKM3305C	SCM	铬钼合金	58-62 HRC	5	铝合金(阳极氧化)
AKM3310C	SCM	铬钼合金	58-62 HRC	10	铝合金(阳极氧化)

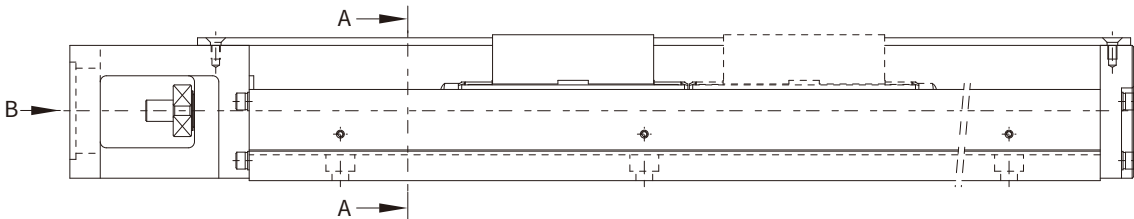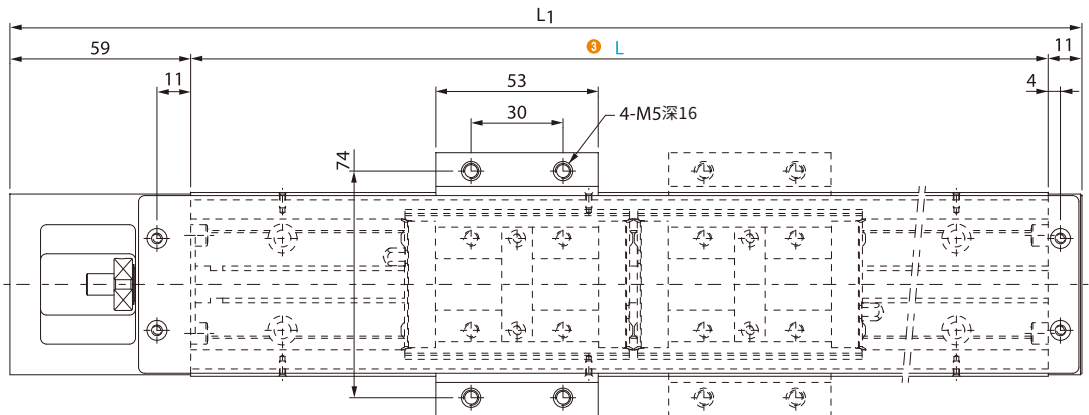

B向

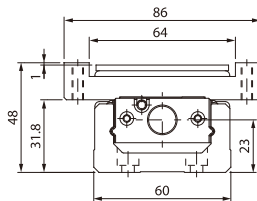

剖面:A-A

型号		③轨道长度L	④滑块数量	⑤电机连接法兰	⑥感应器选择	有效行程		总长度L1	安装孔尺寸					参考重量(kg)		
①代码	②精度					(单滑块)	(双滑块)		E	n	E1	n1	F	(单滑块)	(双滑块)	
AKM3305C AKM3310C	C P	150	1(单滑块)	30 3A	0 1 2 3	54.5	-	220	25	2	25	50	2	1.87	-	
		200				104.5	-	270						2.18	-	
		300				204.5	128	370						2.76	3.21	
		400	2(双滑块)	3D		304.5	228	470	50	4	100	50	3	3.38	3.83	
		500				404.5	328	570						4.09	4.54	
		600				504.5	428	670						4.71	5.16	