



型号
BAHH6900ZZ




型号区分: **5** 天发货

■ 160℃耐热润滑脂封入型滚珠轴承



BAHH6□□ZZ
BAHH6□□□ZZ

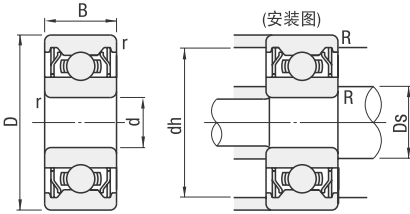

代码	内·外环		屏蔽	滚动体	保持器
	材质	硬度	材质	材质	材质
BAHH ZZ	SUS440C	57~63HRC	SUS304	SUS440C	SUS304

轴承精度 GB 307 P0
JIS B 1514 0级
使用温度 0~+160℃

型号	d	D	B	r (min.)	基本额定负载		容许转速 rpm (参考)	安装尺寸			重量 (g) (参考)
					Cr (动) N	Cor (静) N		Ds (min.)	dh (max.)	R (max.)	
BAHH695ZZ	5	13	4	0.2	915	346	43000	6.6	11.4	0.2	2.4
BAHH605ZZ		14	5		1130	406	40000		12.4		3.5
BAHH625ZZ		16	0.3	1470	540	36000	7	14	0.3	4.8	
BAHH696ZZ	6	15	6	0.2	1139	418	40000	7.6	13.4	0.2	3.8
BAHH606ZZ		17			1924	677	38000	8	15	0.3	6.0
BAHH626ZZ		19			1986	717	32000		17		8.1
BAHH698ZZ					22	1901	734	36000	17		7.3
BAHH608ZZ	8	22	7	0.3	2799	1103	34000	10	20		0.3
BAHH628ZZ		24	8		2833	1138	28000		22	17	

型号	d	D	B	r (min.)	基本额定负载		容许转速 rpm (参考)	安装尺寸				重量(g (参考)			
					Cr(动) kN	Cor(静) kN		Ds		dh (max.)	R (max.)				
								(min.)	(max.)						
BAHH6900ZZ	10	22	6	0.3	2.29	1.01	34000	12	12.5	20	0.3	10			
BAHH6000ZZ		26	8		3.90	1.57	31000		13	24		19			
BAHH6200ZZ		30	9		0.6	4.35	1.91		24000	16		26	0.6	32	
BAHH6901ZZ	12	24	6	0.3	2.45	1.16	31000	14	14.5	22	0.3	11			
BAHH6001ZZ		28	8		4.35	1.89	27000		15.5	26		22			
BAHH6201ZZ		32	10		0.6	5.80	2.44		22000	17		28	0.6	37	
BAHH6902ZZ	15	28	7	0.3	3.70	1.80	26000	17	19	26	0.3	17			
BAHH6002ZZ		32	9		4.75	2.26	23000		17	30		30			
BAHH6202ZZ		35	11		0.6	6.50	3.00		20000	19		20.5	31	0.6	45
BAHH6903ZZ	17	30	7	0.3	3.90	2.04	23000	19	19.5	28	0.3	18			
BAHH6003ZZ		35	10		5.10	2.60	21000		21.5	33		39			
BAHH6203ZZ		40	12		0.6	8.15	3.84		17000	21		23.5	36	0.6	65
BAHH6904ZZ	20	37	9	0.3	5.40	2.96	19000	22	24	35	0.3	36			
BAHH6004ZZ		42	12		0.6	7.95	4.00		17000	24		25.5	38	0.6	69
BAHH6204ZZ		47	14		1.0	10.90	5.28		15000	25		26.5	42	1.0	106