




导向轴支座



支架型


标准·定位孔型

■ 标准型



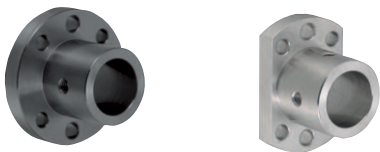


代码		材质	表面处理
圆法兰型	两面切割法兰型		
ABSFBK	ABSHBK	S45C	发黑
ABSFK	ABSHK		无电解镀锌
ABSSFK	ABSSHK	SUS304	—

■ 圆法兰型 (D12~30) ABSFBK ABSFK ABSSFK



■ 两面切割法兰型 (D16~30) ABSHBK ABSHK ABSSHK



① 代码 ② D
ABSHK 20

■ 请按步骤①~②选择型号和参数后进行订购。



型号区分: 7 天发货

型号		D1	H	固定部 壁厚(N)	L	T	ℓ	P	Q	W	P1	F	d1	M (粗牙螺纹)
① 代码	② DH7													
圆法兰型	12	16	36	2	24	6	15	26	4	20	28	—	4.5	M4
ABSFBK	13	18	38	2.5	24		15	28		22	28			
ABSFK	15	20	40	2.5	30		18	30		24	30			
ABSSFK	16	22	42	3	32		19	32	5	26	28	16		
两面切割法兰型	18	28	50	5	32	8	20	39		32	31	22	5.5	M5
ABSHBK	20	33	50	4	32		20	39	6	32	31	22		
ABSHK	25	33	55	4	38		23	44		37	36	24		
ABSSHK	30	38	66	4	38		24	52		42	41	27	6.6	M6

① 两面切割法兰仅D尺寸16~30适用。