



歧管块

液压·水压用/气压用歧管块
T字孔型



型号 (1) 代码 (2) 连续孔数

FCAN3

(3) No.
11

■ 请按步骤 1~3 选择型号和参数后进行订购。




型号区分:

代码

7 天发货



代码	材质	表面处理	最高使用压力
FCAN	S45C	镀锌	20.6MPa≈210kgf/cm ² 以下
FCANR	SUS304	—	—
FCGN	铝合金	—	1MPa≈10kgf/cm ² 以下

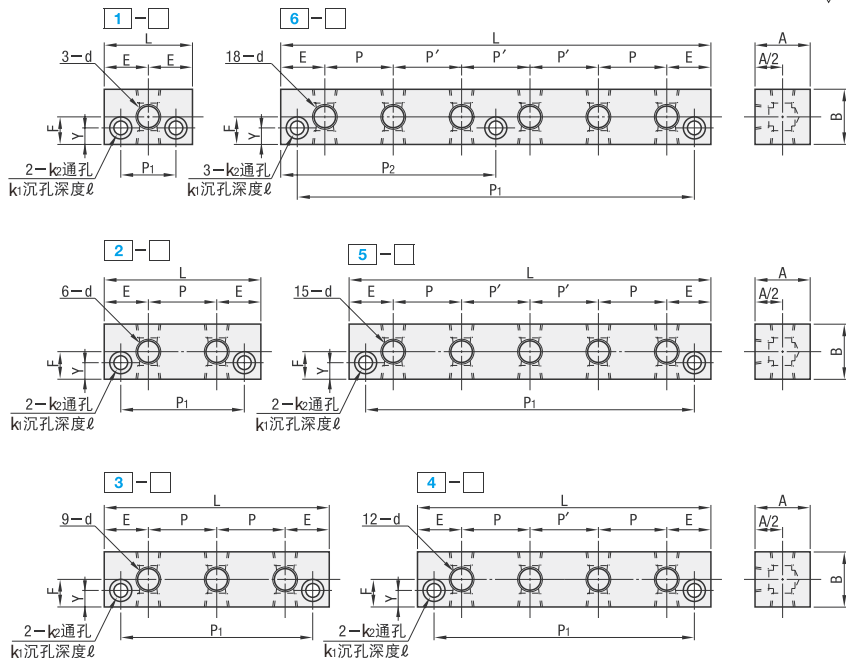

型号		③ No.	d Rc (PT)	A	B	L	P	P'	P ₁	P ₂	E	F	Y	k ₁	k ₂	ℓ
① 代码	② 连续孔数															
FCAN (液压用) FCANR (水压用) (带*符号的仅FCAN用)	1	11	1/8	40	30	40	—	—	25	—	20	B/2	7	11	6.6	6.5
		22	1/4		30	80	40	—	65	—	20					
	2	11	1/8		30	40	—	—	25	—	20					
		22	1/4		30	80	40	—	65	—	20					
	3	33	3/8		40	120	38	—	105	—	21					
		11	1/8		30	40	—	—	105	—	20					
	* 4	22	1/4		30	160	40	40	145	—	20					
		33	3/8		40	200	39	40	185	—	21					
	* 5	11	1/8		30	240	40	40	225	120	20					
		22	1/4		30	240	39	40	225	120	21					
	* 6	33	3/8		40	240	39	40	225	120	21					
		11	1/8		30	240	39	40	225	120	21					

型号		③ No.	d Rc (PT)	A	B	L	P	P'	P ₁	P ₂	E	F	Y	k ₁	k ₂	ℓ
① 代码	② 连续孔数															
FCGN (气压用)	1	11	1/8	25	25	40	—	—	25	—	20	12.5	7	9.5	5.5	5.5
		22N	1/4	35	35	70	30	—	55	—	20	17.5				
	2	11	1/8	25	25	100	30	—	85	—	20	12.5	7	9.5	5.5	5.5
		22N	1/4	35	35	130	30	30	115	—	20	17.5				
	3	11	1/8	25	25	160	30	30	145	—	20	12.5	7	9.5	5.5	5.5
		22N	1/4	35	35	190	30	30	175	95	20	17.5				
	4	11	1/8	25	25	—	—	—	—	—	—	—	7	9.5	5.5	5.5
		22N	1/4	35	35	—	—	—	—	—	—	—				
	5	11	1/8	25	25	—	—	—	—	—	—	—	7	9.5	5.5	5.5
		22N	1/4	35	35	—	—	—	—	—	—	—				
	6	11	1/8	25	25	—	—	—	—	—	—	—	7	9.5	5.5	5.5
		22N	1/4	35	35	—	—	—	—	—	—	—				