



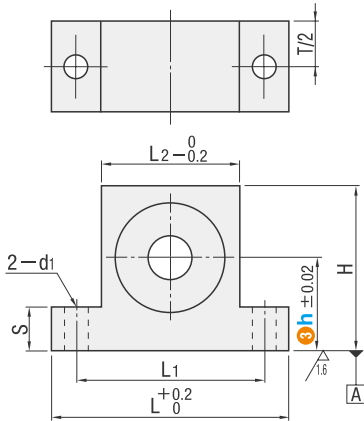

代码	材质		表面处理	附件 挡圈
	轴承	固定座	固定座	
BBMW6 BBMW	钢	S45C	发黑 无电解镀锌	弹簧钢 SUS304

6.3/(1.6/)



轴承·关节轴承
轴承座组件



型号(1代码·2轴承型号) — 3h
BBMW6000ZZ — 30

■ 请按步骤①~③选择型号和参数后进行订购。



型号区分: 7 天发货

型号		高度	d	H	L ₁	d ₁	L	L ₂	T	S	dh	DH7	B
① 代码	② 轴承型号	③ h											
BBMW6 BBMW	605ZZ	15 20 25	5	h+11	30	4.5	40	20	15	5	10	14	5
	606ZZ	20 25 30	6	h+13	35	5.5	47	23	18	10	13	17	6
	608ZZ	20 25 30	8	h+15	41		53	29	19		18	7	
	6900ZZ	20 30 40	10						18		19	6	
	6000ZZ	20 30 40	10	h+17	46		58	34	23		22	26	8
	6901ZZ	20 30 40	12	h+16	44	56	32	18	21	24	6		
	6001ZZ	20 30 40	12	h+18	48	60	36	23	24	28	8		
	6902ZZ	30 40 50	15	h+18				19	25		7		
	6002ZZ	30 40 50	15	h+20	54	6.5	68	40	24	28	32	9	
	6903ZZ	30 40 50	17	h+19	52		64	38	20	27	30	7	
	6003ZZ	30 40 50	17	h+22	56		70	43	26	31	35	10	
	6904ZZ	40 50 60	20	h+23	59	9	73	45	24	34	37	9	
	6004ZZ	40 50 60	20	h+25	66		82	50	31	36	42	12	
	6005ZZ	40 50 60	25	h+28	76		96	56		41	47		
	6006ZZ	40 50 80	30	h+32	84	11	104	64	32	20	48	55	13



型号(1代码·2轴承型号) — 3h — (KCC·KCC·NA)
BBMW6000ZZ — 30 — NA

可选加工	加工倒角C	加工倒角C2	不装配轴承・挡圈								
代码	KKC	KCC	NA								
技术说明	加工上端两侧倒角C(45°) 指定方法 KKC  <table><tr><td>d</td><td>KKC</td></tr><tr><td>5~8</td><td>5</td></tr><tr><td>10~20</td><td>10</td></tr><tr><td>25~30</td><td>12</td></tr></table>	d	KKC	5~8	5	10~20	10	25~30	12	加工上端面倒角C2	不将轴承、挡圈装入固定座中，而以附件形式发货。
d	KKC										
5~8	5										
10~20	10										
25~30	12										