



■ 螺栓固定型




D公差 (g6)

3	—0.002 —0.008
4~6	—0.004 —0.012
8 · 10	—0.005 —0.014
12~16	—0.006 —0.017
20 · 25	—0.007 —0.020

代码		材质	硬度	表面处理	附件		
L尺寸固定型	L尺寸指定型						
BDMG	BDLGN	S45C	—	发黑	2个开口销	SWRM	
BDMGH	BDLGHN		40～45HRC				无电解镀镍
—	BDPLGN		—			镀层硬度750HV～	
—	BDPLGHN		40～45HRC	—			
—	BDGLGN		—			—	—
BDSMG	BDSLGN	SUS304	—	—	—		
—	BDSLGHN	SUS440C	45～50HRC			—	—

25 / (1.6 /)

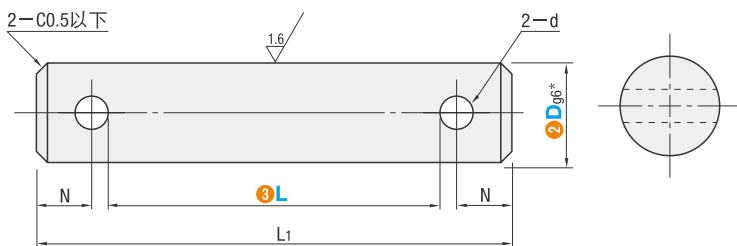

型号(1)代码·(2)D — (3)L
BDMG8 — 30
BDLGN15 — 90.3

■ 请按步骤1~3选择
型号和参数后进行订购。



型号区分: 7 天发货

■ L尺寸固定型

型号		L选择	L1	N	d
1 代码	2 D				
BDMG BDMGH (淬火型)	3	10 12 14 15 16 18 20	L+ 4.8	2	0.8
	4	10 12 14 15 16 18 20	L+ 6	2.5	1
	5	10 12 14 15 16 18 20	L+ 7.2	3	1.2
	6	15 16 18 20 22 24 25 30	L+ 8.6	3.5	1.6
BDSMG	8	18 20 22 24 25 30 35 40 45 50	L+10	4	2
	10	22 24 25 30 35 40 45 50	L+12.5	5	2.5
	12	22 24 25 30 35 40 45 50	L+15.2	6	3.2

■ L尺寸指定型 (最小单位0.1mm)

型号		L1	N	d
1 代码	2 D			
BDLGN BDLGHN BDPLGN BDPLGHN BDGLGN BDGLGHN BDSLGN BDSLGHN	3	L+ 4.8	2	0.8
	4	L+ 6	2.5	1
	5	L+ 7.2	3	1.2
	6	L+ 8.6	3.5	1.6
	8	L+10	4	2
	10	L+12.5	5	2.5
	12	L+15.2	6	3.2
	15	L+18	7	4
	16	L+22	8.5	5
	20			
	25			