




D公差 (g6)	
2 · 3	-0.002 -0.008
4~6	-0.004 -0.012
8 · 10	-0.005 -0.014
12~16	-0.006 -0.017
20 · 25	-0.007 -0.020

代码		材质	硬度	表面处理	附件	
L尺寸固定型	L尺寸指定型					
BDDG	BDCG	S45C	—	发黑	挡圈2个	弹簧钢
BDDGH	BDCGH		40～45HRC			
—	BDPCG		—	无电解镀锌		SUS304
—	BDPCGH		40～45HRC			
—	BDGCG	SUS304	镀层硬度750HV～	镀硬铬	弹簧钢	
BDS DG	BDS CG		—	—	—	
—	BDSCGH	SUS440C	45～50HRC	—	SUS304	
—	BDGSCGH		45～50HRC 镀层硬度750HV～	镀硬铬	SUS304	

25 / (1.6)

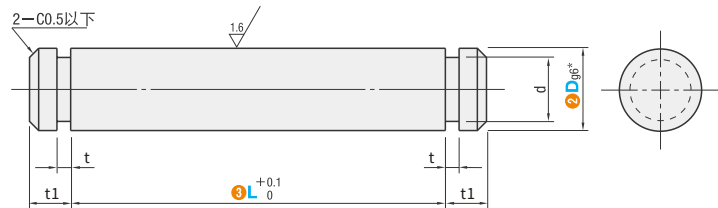

型号(1)代码·(2)D — (3)L
BDDG8 — 30
BDCG15 — 90.3

■请按步骤①~③选择
型号和参数后进行订购。



型号区分: 7 天发货

■L尺寸固定型

型号		L 选择	t		t1	d		附属挡圈	
① 代码	② D		公差			公差		形状	JIS公称规格
BDDG BDDGH (淬火型)	3	10 12 14 15 16 18 20 22 24 25 30	0.5	+0.05 0	2	2	+0.06 0	E型	No.2
	4		0.7	+0.1 0		3	+0.075 0		No.3
	5					4			No.4
	6					5			No.5
BDS DG (不锈钢型)	8	15 16 18 20 22 24 25 30 35 40 45 50	0.9	+0.14 0	3	7	+0.09 0	C型	No.7
	10	18 20 22 24 25 30 35 40 45 50	1.15			9.6	-0.09 0		No.10
	12	22 24 25 30 35 40 45 50				4	11.5		-0.11 0

■L尺寸指定型 (最小单位0.1mm)

型号		③L 最小单位 0.1mm	t		t1	d		附属挡圈	
① 代码	②D		公差			公差		形状	JIS公称规格
BDCG BDCGH BDPCG BDPCGH BDGCG BDS CG BDS CGH BDGSCGH	3	5.0～ 50.0	0.5	+0.05 0	2	2	+0.06 0	E型	No.2
	4		0.7	+0.1 0		3	+0.075 0		No.3
	5					4			No.4
	6	10.0～100.0				5	+0.09 0		No.5
	8	0.9	+0.14 0	3	7	C型		No.7	
	10	15.0～100.0			1.15		9.6	-0.09 0	No.10
	12	15.0～150.0		4	11.5		-0.11	No.12	
	15	25.0～150.0			14			No.15	
	16	30.0～150.0			15			No.16	
	20	1.35			19		0 -0.21	No.20	
	25				24			No.25	