



型号 (① 代码 · ② D · ③ 导程) — ④ L
AJSSR812
AJSSRN812

■ 请按步骤 ① ~ ④ 选择型号和参数后进行订购。





型号区分: ④ 代码 7 天发货

■ 微型滑动丝杠/螺帽

代码	材质	
	轴	螺帽
AJSSR	右螺纹	SUS304
AJSSRN	—	特殊树脂

① AJSSR为轴与螺帽配套、
AJSSRN为仅有螺帽，且也可用于
AJSSRA·AJSSRW。

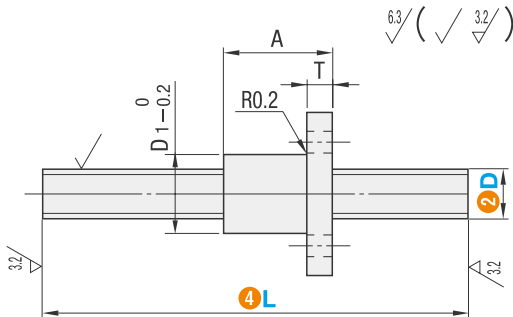

型号			④ L 最小单位 1mm	头数	树脂螺帽尺寸							容许轴向负载 N (参考)	容许旋转 速度 rpm (参考)	紧固扭矩 N · mm	重量 (参考) g/100mm
① 代码	② D	③ 导程			D ₁	H	A	T	B	P	d				
AJSSR AJSSRN (仅螺帽)	4	01	30~150	1	10	23	11.5	3.5	15	15	2.9	50	2500	180	11(3)
		02		2								60			11(3)
	6	01	30~250	1	12	26	14.5	3.5	17	18	3.4	120	2000	400	23(3)
		02		4								60			25(3)
		09										90			25(3)
		18										110			25(3)
	8	01	40~250	1	14	29	18	4	18	21	3.4	200	2000	400	42(5)
		02		4								290			38(5)
		12	40~350									210			40(5)
		24										210			41(4)
	10	02	50~250	1	16	33	22	5	21	24	4.5	460	1500	500	59(6)
		15		4								410			58(6)
		30	50~500	6								440			56(6)
	12	02	50~250	1	18	35	25	5	22	26	4.5	660	1000	500	86(8)
		18		6								750			86(8)
		36	50~550									540			87(7)