



① 型号
ECWB

② T公差选择
B

③ D
D20.0

④ V
V8.0

⑤ T
T5.0

■ 请按步骤①~⑤选择型号和参数后进行订购。



型号区分:


代码

7 天发货



型号	材质	表面处理	硬度
ECWC	S45C	—	—
ECWB		发黑	
ECWM		无电解镀镍	
ECWS	SUS304	—	45~50HRC
ECWH	SUS440C	—	

B	-0.1 -0.3	SB	-0.01 -0.03
C	+0.3 +0.1	SC	+0.03 +0.01
D	0 -0.2	SD	0 -0.02
E	+0.2 0	SE	+0.02 0

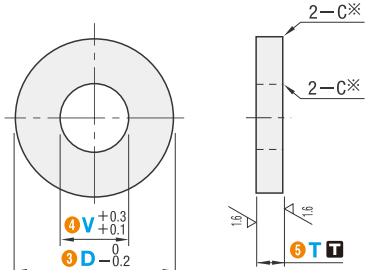

※D=16以下 C0.2以下
D=16.5以上 C0.5以下

① 型号	② T 公差选择	③ D	④ V 最小单位 0.5mm	⑤ T 最小单位 0.1mm
ECWC ECWB ECWM ECWS ECWH	—普通级— B C D E	5.0~10.0 单位0.5mm	3.0~58.0	1.0~2.9
		10.5~20.0 单位0.5mm		3.0~5.0
		21~30 单位1mm		5.1~10.0
		31~40 单位1mm		1.0~2.9
		41~50 单位1mm		3.0~5.0
		51~60 单位1mm		5.1~10.0
	—精密级— SB SC SD SE	5.0~10.0 单位0.5mm		1.0~2.9
		10.5~20.0 单位0.5mm		3.0~5.0
		21~30 单位1mm		5.1~10.0
		31~40 单位1mm		1.0~2.9
		41~50 单位1mm		3.0~5.0
		51~60 单位1mm		5.1~10.0

① V≤D-2 * 材质SUS304(精密级) T≥3.1