



型号 ① 代码 · ② D

CAPO25
CAPOC20

③ d₁

8
6

④ d₂

10
8

■ 请按步骤①~④选择型号和参数后进行订购。




型号区分:

代码


3 天发货




CAPO (螺丝固定型)

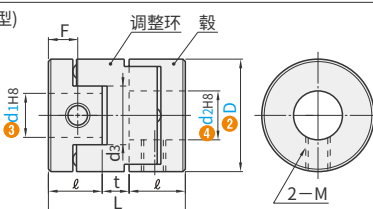

零件	材质	表面处理	附件
毂	铝合金	阳极氧化处理	固定螺丝
调整环	聚缩醛(POM)	—	



CAPOC (螺丝夹持型)

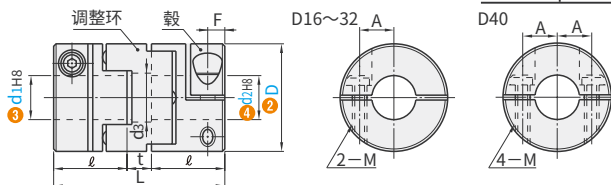

零件	M 材质	S 表面处理	A 附件
毂	铝合金	阳极氧化处理	内六角螺栓
调整环	聚缩醛(POM)	—	

型号		③ d ₁ 、④ d ₂ 选择(但d ₁ ≤d ₂)							d ₃	L	R	t	F	A	固定螺塞·夹紧螺栓				
① 代码	② D														M	紧固扭矩 (N·m)			
CAPO	16	3	4	5	6	6.35			7	18	7	4	3.5	—	3	7.0			
	20		4	5	6	6.35	8		9	23	9	5	4.5		4	1.7			
	25			5	6	6.35	8	9.525	10	11	28	11	6		5.5	5	4		
	32						8			10	12	14	7		6.5	6	7		
	40									10	12	14	15		16			17	32
CAPOC	16			5	6				7	9	3		3	5	2.5	1			
	20				6	6.35	8		9	33	14	5		6.5	9	3	1.5		
	25					6.35	8	10	11	39	17	5	3.8	11				4	2.5
	32						8	10	11	45	19	7	4.5	11				4	2.5
	40								12	14	50	23	4	7				13	5

型号		容许扭矩(N·m)	容许偏角(°)	容许偏心(mm)	静态扭转刚度(N·m/rad)	最高转速(r/min)	惯性力矩(kg·m ²)	重量(g)
① 代码	② D							
CAPO	16	0.7	3	1.0	31	39000	3.2 × 10 ⁻⁷	7
	20	1.2		1.5	60	31000	1.0 × 10 ⁻⁶	14
	25	2		2.0	140	25000	3.0 × 10 ⁻⁶	27
	32	4.5		2.5	280	19000	9.5 × 10 ⁻⁶	50
	40	9		3.0	540	15000	2.3 × 10 ⁻⁵	80
CAPOC	16	0.7	3	1.0	31	39000	5.8 × 10 ⁻⁷	12
	20	1.2		1.5	60	31000	1.5 × 10 ⁻⁶	19
	25	2		2.0	140	25000	4.4 × 10 ⁻⁶	36
	32	4.5		2.5	280	19000	1.4 × 10 ⁻⁵	69
	40	9		3.0	540	15000	4.1 × 10 ⁻⁵	130




型号 ① 代码 · ② D — ③ d₁(LDC) — ④ d₂(RDC) — (LK·RK)

CAPO16 — LDC4.5 — RDC5.5
CAPOC25 — LDC6 — 10 — RK3

可选加工

可选加工	变更轴孔径	键槽加工
技术说明		
	最小单位0.1mm [指定方法] LDC 5.6 RDC 10.2	指定方法 轴径d ₁ ·d ₂ LK RK
	CAPO · CAPOC	LK4 8 · 10 3
	D LDC · RDC	10~12 4
	16 3~6.35	12~16 5
代码	20 4~8	
	25 5~10	
	32 8~14	
	40 8~16	

■ 键槽尺寸



轴孔径 d ₁ , d ₂	基准尺寸	容差	基准尺寸	容差	键公称尺寸 b×h
10	3	±0.0125	1.4	+0.1	3×3
11 · 12	4	±0.0150	1.8	0	4×4
14 · 15 · 16	5		2.3		5×5