



链轮/链条

【传动用】链轮、链条

80B系列 / 16A

链轮·链条

■ 请按步骤①~④选择型号和参数后进行订购。



链条

节数指定型

选型示范

链轮

① 型号

CEE80

② 链数

200

型号(①代码·②齿数)

CE80B15

③ 规格

N

④ 轴孔直径

40



型号区分:

交货期

代码

7


天发货

■ 链条80B



代码	材质
CEE80	钢
CEEH80	钢

CEEH是强度高于CEE的链条。

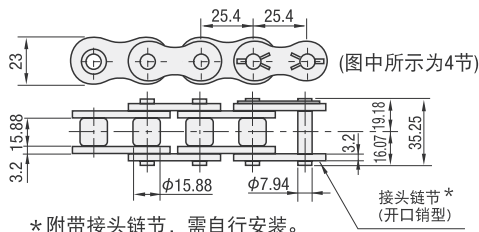

■ 节数指定型

① 型号	② 节数指定 (指定偶数)	h	m	n	t	容许 最大张力(kN)	节距(p)
(链条) CEE80	4~	16.07	19.18	35.25	3.2	14.71	25.4
(链条) CEEH80	4~	17.70	20.80	38.50	4.0	16.67	



■ 链轮80B



■ 轴孔加工尺寸表


轴孔直径D	键槽b2×t2	固定螺丝M
25~30	8×3.3	8
32~38	10×3.3	8
40~42	12×3.3	8
45~50	14×3.8	10

代码	材质	附件
CE80B	S45C (齿顶高频淬火)	固定螺丝 (仅轴孔规格N)



轴孔规格 **S**
(底孔)

轴孔规格 **N**
(新JIS键+螺纹孔)



① 齿顶和键槽的偏移量为±0.5mm

型号		③轴孔规格	④轴孔直径							Dp	Do	毂			ℓ				
① 代码	② 齿数		S规格 (DH8)	N规格 (DH7)								H	GD	L					
CE80B	* 9	S N	14	25	28	30	32				74.27	85	58	44	40	7			
	10		15	25	28	30	32				82.19	93	52	—		12			
	11		15	25	28	30	32	35	38		90.16	102	60						
	12		15	25	28	30	32	35	38	40	42	98.14	110				67		
	13		16	25	28	30	32	35	38	40	42	45	50				106.14	118	77
	14		16	25	28	30	32	35	38	40	42	45	50				114.15	127	
	15		20	25	28	30	32	35	38	40	42	45	50				122.17	135	93
	16		20	25	28	30	32	35	38	40	42	45	50				130.2	143	
	17		20	25	28	30	32	35	38	40	42	45	50				138.23	151	
	18		20	25	28	30	32	35	38	40	42	45	50				146.27	159	
	19		20	25	28	30	32	35	38	40	42	45	50				154.32	167	
	20		20	25	28	30	32	35	38	40	42	45	50				162.37	176	
	21		20	25	28	30	32	35	38	40	42	45	50				170.42	184	