



型号 (1 代码 · 2 NO)

IAU1025
IAU3055


■ 请按步骤①~②选择
型号和参数后进行订购。



型号区分: 代码 5 天发货




代码	滑台		耐热温度	滑轨
	材质	表面处理		
IAU	S45C	发黑	-20~110℃	使用 IARV

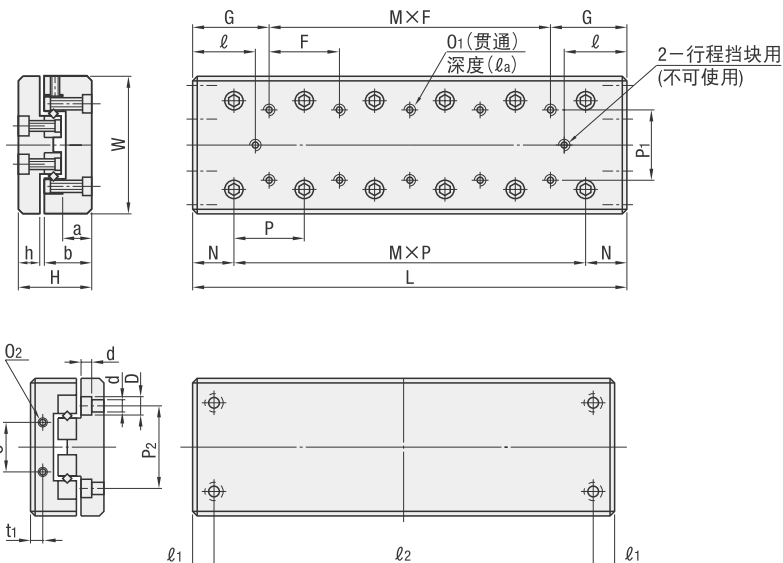

型号		主要尺寸			滑台表面安装孔尺寸					滑台表面尺寸				侧面尺寸						滑轨安装孔尺寸						
① 代码	② No.	行程 (往返)	H	W	L	G	M×F	P ₁	O ₁	ℓ _a	N	P	M×P	ℓ	a	b	h	C	t ₁	O ₂	P ₂	d	D	ℓ ₁	ℓ ₂	
IAU	1025	12	17±0.1	30 ^{-0.2 -0.4}	25	12.5	—	10	M2	4	7.5	10	1×10	2.5	7	11	5.5	12	2.5	M2	22	2.5	4.5	3.5		18
	1035	18			35		1×10						2×10	4.5												28
	1045	25			45		2×10						3×10	6												38
	2035	18	21±0.1	40 ^{-0.2 -0.4}	35	17.5	—	15	M3	6	10	15	1×15	3	8	14	6.5	16	3.4	M2	30	3.5	6.5	5	25	
	2050	30			50		1×15						2×15	4.5											40	
	2065	40			65		2×15						3×15	7											55	
	3055	30	28±0.1	60±0.1	55	27.5	—	25	M4	8	15	25	1×25	5.5	10.5	18.5	9	40	5.5	M3	40	4.5	8	10	35	
	3080	45			80		1×25						2×25	10.5											60	

No.	容许静力矩			基本额定负载		精度	
	MA N·m	MB N·m	MC N·m	C(动) N	Co(静) N	指示值 A (μm)	指示值 B (μm)
1025	1.79	1.79	3.23	465	478	2	4
1035	4.18	4.18	6.46	807	956		5
1045	5.38	5.38	8.07	962	1195		4
2035	7.04	7.04	10.6	1101	1174		5
2050	11.7	11.74	15.8	1521	1761		4
2065	16.4	16.4	21.1	1908	2348		5
3055	33.8	33.8	56.9	3617	4062	5	5
3080	60.9	60.9	94.8	5409	6770		

国际单位1N=0.102kgf

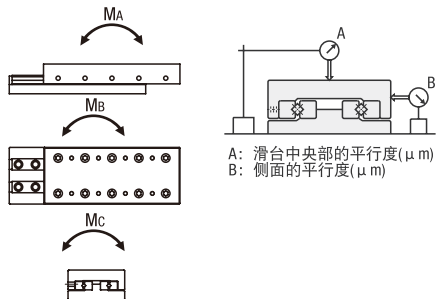

A: 滑台中央部的平行度(μm)
B: 侧面的平行度(μm)