


挡圈-孔用弹性挡圈-A型

代码	标准	标准名称	材质	级别	表面处理
MPG893.1C02B0AF	GB893.1	孔用弹性挡圈-A型	碳钢	44-51HRC	发黑
MPG893.1C03B0AF			碳钢	47-54HRC	发黑
MPG893.1S00P0AF			不锈钢304	-	本色

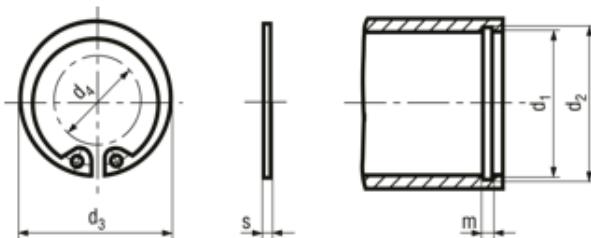

单位: mm

代码	d1	d3	d4 max.	d2 H11/H12	m H13	s	d1	d3	d4 max.	d2 H11/H12	m H13	s
MPG893.1C02B0AF	φ9	9.8	2	9.4	0.7	0.6	φ38	40.8	26	40	1.7	1.5
	φ10	10.8	2	10.4	0.9	0.8	φ40	43.5	27	42.5	1.7	1.5
	φ11	11.8	3	11.4	0.9	0.8	φ42	45.5	29	44.5	1.7	1.5
	φ12	13	4	12.5	0.9	0.8	φ45	48.5	31	47.5	1.7	1.5
	φ13	14.1	4	13.6	0.9	0.8	φ47	50.5	32	49.5	1.7	1.5
	φ14	15.1	5	14.6	1.1	1	φ48	51.5	33	50.5	1.7	1.5
	φ15	16.2	6	15.7	1.1	1	φ50	54.2	36	53	2.2	2
	φ16	17.3	7	16.8	1.1	1	φ52	56.2	38	55	2.2	2
	φ17	18.3	8	17.8	1.1	1	φ55	59.2	40	58	2.2	2
	φ18	19.5	9	19	1.1	1	φ56	60.2	41	59	2.2	2
	φ19	20.5	10	20	1.1	1	φ58	62.2	43	61	2.2	2
	φ20	21.5	10	21	1.1	1	φ60	64.2	44	63	2.2	2
	φ21	22.5	11	22	1.1	1	φ62	66.2	45	65	2.2	2
	φ22	23.5	12	23	1.1	1	φ63	67.2	46	66	2.2	2
	φ24	25.9	13	25.2	1.3	1.2	φ65	69.2	48	68	2.7	2.5
	φ25	26.9	14	26.2	1.3	1.2	φ68	72.5	50	71	2.7	2.5
	φ26	27.9	15	27.2	1.3	1.2	φ70	74.5	53	73	2.7	2.5
	φ28	30.1	17	29.4	1.3	1.2	φ72	76.5	55	75	2.7	2.5
	φ30	32.1	18	31.4	1.3	1.2	φ75	79.5	56	78	2.7	2.5
	φ31	33.4	19	32.7	1.3	1.2	φ78	82.5	60	81	2.7	2.5
	φ32	34.4	20	33.7	1.3	1.2	φ80	85.5	63	83.5	2.7	2.5
	φ34	36.5	22	35.7	1.7	1.5	φ85	90.5	68	88.5	2.7	2.5
	φ35	37.8	23	37	1.7	1.5	φ88	93.5	70	91.5	2.7	2.5
	φ36	38.8	24	38	1.7	1.5	φ90	95.5	72	93.5	2.7	2.5
	φ37	39.8	25	39	1.7	1.5	φ95	100.5	75	98.5	2.7	2.5

震坤行工业超市(上海)有限公司

上海市虹桥商务区申滨路36号丽宝广场T4座4F-7F/上海浦东科苑路399号5号楼|电话400-680-9696|传真021-50801998

*本文件包含震坤行知识产权，未经书面授权，不允许任何形式的复印和传播