



型号(①代码·②D) — ③P
AJTSWB15
AJTSBB8 — 30

■ 请按步骤①~③选择型号和参数后进行订购。




型号区分: ④代码 7 天发货


■ 防转动固定件 双螺栓型



横向紧固双螺栓型




纵向紧固双螺栓型

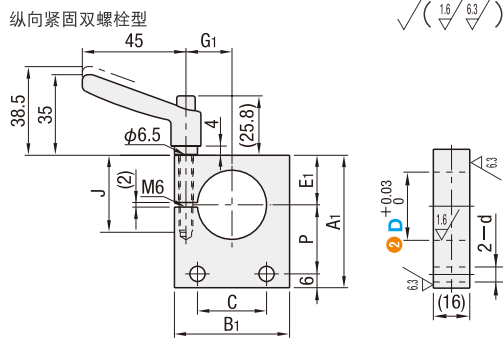

√(1.6/6.3)

型号		P	横向紧固双螺栓型						纵向紧固双螺栓型						d										
① 代码	② D		A	B	C	E	G	X	A ₁	B ₁	C	E ₁	G ₁	J											
横向紧固双螺栓型 AJTSWB AJTSWM	8	+0.03 0	20	43	25	14	17	12	5	33	32	14	7	11	16	5.5									
	10								4	34			8												
	12								3	35			9		20										
15	4.7								37	38			20		11		13								
纵向紧固双螺栓型 AJTTBB AJTTBM	20		30	56	38	26	20	15	4.6	50	44	26	14	15	25		6.5								
	25												28	23	18			1.3	54	50	28	18	18		
	30												61	44	30			25	20	1.2	57	30	21	20	32

■ 防转动固定件

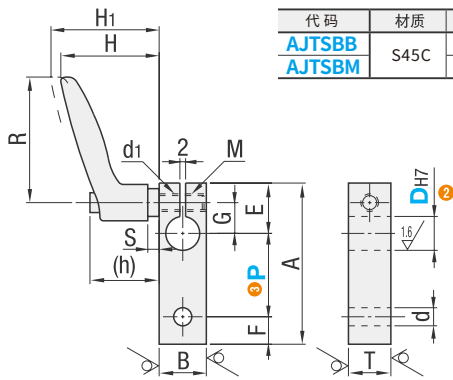

6.3/√(1.6/6.3)

代码	材质	表面处理	附件
AJTSBB AJTSBM	S45C	发黑 无电解镀锌	固定把手

型号			P	A	B	d	E	F	G	T	d ₁	M	H	H ₁	R	(h)	S
①代码	②DH7																
面接点型 AJTSBM	8	+0.015 0	20 30 40	P+26	12	6.5	16	10	9	16	6.5	M6	35	38.5	45	25.8	4
	10			P+27	17		10										
	12			P+28	18		11										
	15	+0.018 0	20 30 50	P+29	22	19	12										
	17			P+30		20	13										
	20			P+37		25	16										
	25	+0.021 0	P+39	32	27	18											
	30		P+42	38	9.0	12	21	19	9.0	M8	45.5	49	63	32.3	7		
	*35		+0.025 0	P+44	44	32	23										
*40	P+47	35		26													

(①带*符号的仅AJTSBB有)