

新增

悬臂销

一端内螺纹一端外螺纹型 重载型

悬臂销/铰链销/支点用台阶螺丝



型号(1代码·2D) - (3Y) - (4F) - (5T) - (6N)
BDAGCH6 - 10 - F15 - T3 - N6

■请按步骤①~⑤选择
型号和参数后进行订购。



型号区分: 7 天发货





代码	材质	表面处理
一端内螺纹一端外螺纹型		
BDAGCH	S45C	发黑
BDAHCHN		无电解镀锌
BDAJS	SUS304	—

表1


N	Y+F
M4	Y+F≥14.0
M5	Y+F≥16.2
M6	Y+F≥18.5
M8	Y+F≥23.5
M10	Y+F≥28.5
M12	Y+F≥35.3
M16	Y+F≥45.0
M20	Y+F≥55.0

一端内螺纹一端外螺纹型

BDAGCH
BDAHCHN
BDAJS

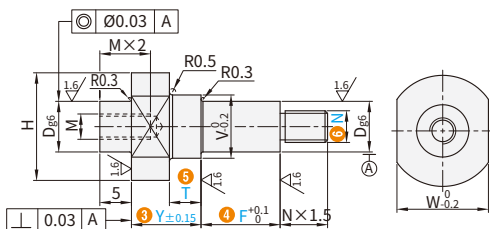

Y≥17时,两平面
宽度尺寸




①外螺纹退刀槽尺寸见表2。

■ 一端内螺纹一端外螺纹型

型号	2 D _{g6}	最小单位1	5 T	6 N	M	V	H	W
1 代码	3 Y	4 F						
BDAGCH	6	5~80	1 3 5	4 5 6	M3	8	14	12
BDAHCHN	8			5 6 8	M4	10	17	14
BDAJS	10			6 8 10	M6	13	21	18
	12			6 8 10 12		15	24	21
	15					18	28	25
	17					20	32	28
	20					24	36	32
	25					29	43	38
	30					34	50	44

粗牙螺纹			
螺纹直径(N)	g	r	f
4	1.2~1.5	0.2~0.3	2.9~3.2
5			3.9~4.1
6			4.3~4.9
8	1.5~2.5	0.2~0.6	6.3~6.6
10			8.1~8.3
12			9.8~10.1
16	1.5~3.0	0.2~1.0	13.6~13.8
20			17.0~17.2

■表2:外螺纹退刀槽加工尺寸



型号(1代码·2D) - (3Y) - (4F) - (5T) - (6N) - (PD·SET)
BDAGCH6 - 10 - F15 - T3 - N4 - PD

代码	技术说明	
PD	增加导向用平面 	选型方法 PD
SET	附带挡圈 	选型方法 SET ①规格6~8:E形挡圈; 规格10~30:C形挡圈。 ②仅适用带挡圈槽型。

悬臂销·铰链销
支点用台阶螺丝

12