



同步轮/同步带/免键轴衬

带法兰 齿型惰轮

MXL・XL型



型号(①代码·②齿数·③对应皮带)
CBATF40MXL037


■ 请按步骤①~③选择型号和参数后进行订购。



型号区分:
交货期
代码

7 天发货

■ 中心轴承型

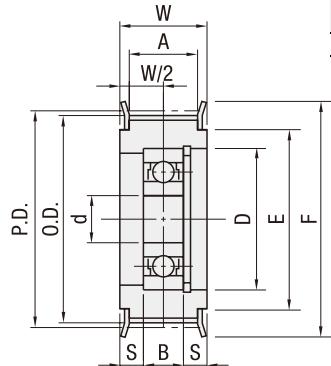

| 型号 | 材质 | | | 表面处理 |
|-------|-----|-----|----|----------|
| | 主体 | 法兰 | 轴承 | |
| CBATF | 铝合金 | 铝合金 | 钢 | 本色阳极氧化处理 |

①轴承采用压入方式。

■ MXL型

| 型号 | 轴径 | P.D. | O.D. | F | E | A | W | S | 轴承尺寸 | | |
|-------|------|--------|--------|-------|-------|----|----|-----|------|------|----------|
| | | | | | | | | | No. | D | B |
| CBATF | ① 代码 | ② 齿数 | ③ 对应皮带 | | | | | | | | |
| | 20 | MXL019 | 3 | 12.94 | 12.43 | 18 | 11 | 6 | 10 | 3 | 693ZZ×1 |
| | 22 | MXL019 | 3 | 14.23 | 13.72 | 18 | 11 | 6 | 10 | 3 | 693ZZ×1 |
| | 24 | MXL019 | 3 | 15.52 | 15.02 | 20 | 13 | 6 | 10 | 3 | 693ZZ×1 |
| | 30 | MXL019 | 5 | 19.4 | 18.9 | 25 | 16 | 6 | 10 | 3 | 695ZZ×1 |
| | 36 | MXL019 | 5 | 23.29 | 22.78 | 28 | 18 | 6 | 10 | 3 | 695ZZ×1 |
| | | MXL019 | | | | | | 6 | 10 | 2.5 | |
| | 40 | MXL025 | 6 | 25.87 | 25.36 | 30 | 20 | 7.5 | 11.5 | 3.25 | 696ZZ×1 |
| | | MXL037 | | | | | | 11 | 15 | 5 | |
| | 50 | MXL019 | 8 | 32.34 | 31.84 | 35 | 25 | 6 | 10 | 2 | 698ZZ×1 |
| | | MXL025 | | | | | | 7.5 | 11.5 | 2.75 | |
| | | MXL037 | | | | | | 11 | 15 | 4.5 | |
| | 60 | MXL019 | 10 | 38.81 | 38.3 | 44 | 32 | 6 | 10 | 2 | 6900ZZ×1 |
| | | MXL025 | | | | | | 7.5 | 11.5 | 2.75 | |
| | | MXL037 | | | | | | 11 | 15 | 4.5 | |

■ XL型

| 型号 | 轴径 | P.D. | O.D. | F | E | A | W | S | 轴承尺寸 | | |
|-------|------|-------|--------|-------|-------|----|----|-----|------|------|----------|
| | | | | | | | | | No. | D | B |
| CBATF | ① 代码 | ② 齿数 | ③ 对应皮带 | | | | | | | | |
| | 18 | XL025 | 6 | 29.11 | 28.6 | 36 | 24 | 7.5 | 12.5 | 3.25 | |
| | | XL031 | | | | | | 9 | 14 | 4 | 626ZZ×1 |
| | | XL037 | | | | | | 11 | 16 | 5 | |
| | 20 | XL025 | 6 | 32.34 | 31.9 | 40 | 27 | 7.5 | 12.5 | 3.25 | 626ZZ×1 |
| | | XL031 | | | | | | 9 | 14 | 4 | |
| | | XL037 | | | | | | 11 | 16 | 5 | |
| | 22 | XL025 | 8 | 35.57 | 35.07 | 45 | 30 | 7.5 | 12.5 | 2.25 | 628ZZ×1 |
| | | XL031 | | | | | | 9 | 14 | 3 | |
| | | XL037 | | | | | | 11 | 16 | 4 | |
| | | XL050 | | | | | | 14 | 19 | 5.5 | |
| | 25 | XL025 | 10 | 40.43 | 39.92 | 48 | 35 | 7.5 | 12.5 | 2.25 | 6000ZZ×1 |
| | | XL031 | | | | | | 9 | 14 | 3 | |
| | | XL037 | | | | | | 11 | 16 | 4 | |
| | | XL050 | | | | | | 14 | 19 | 5.5 | |
| | 28 | XL025 | 10 | 45.28 | 44.77 | 55 | 40 | 7.5 | 12.5 | 2.25 | 6000ZZ×1 |
| | | XL031 | | | | | | 9 | 14 | 2.5 | 6200ZZ×1 |
| | | XL025 | 10 | | | | | 7.5 | 12.5 | 2.25 | 6000ZZ×1 |
| | 30 | XL025 | 10 | | | | | 9 | 14 | 2.5 | 6000ZZ×1 |
| | | XL031 | | | | | | 11 | 16 | 3.5 | 6200ZZ×1 |
| | | XL037 | | | | | | 14 | 19 | 5 | 6200ZZ×1 |
| | | XL050 | | | | | | 7.5 | 12.5 | 2.25 | 6001ZZ×1 |
| | 36 | XL025 | 12 | | | | | 9 | 14 | 2 | 6001ZZ×1 |
| | | XL031 | | | | | | 11 | 16 | 3 | 6201ZZ×1 |
| | | XL037 | | | | | | 14 | 19 | 4.5 | 6201ZZ×1 |
| | | XL050 | | | | | | | | | |



型号(①代码·②齿数·③对应皮带) — (FC · NFC · LFC · RFC)

CBATF40MXL037 — FC43

| 可选加工 代码 | 法兰切割 FC | 不铆接法兰 NFC | 仅铆接单侧法兰 LFC · RFC | |
|------------|---|--------------|----------------------|---|
| | | | 发货时不铆接法兰。 (附带法兰) | 发货时仅铆接挡圈侧(RFC) 或挡圈相反侧(LFC)的单侧法兰。 (附带1个法兰) |
| 技术说明 | 切割法兰, 降低高度。 FC: 0.5mm ① 法兰外周未进行表面处理。 ② $FC \geq (O.D.) + 2$ ③ $FC \leq F - 2$ [指定方法] FC43 | | | |

询价④种方式



官网 <http://www.srdfaa.com>

深圳市仕瑞达自动化设备有限公司



全国免费 400-966-3863
客服热线 0755-27926613